

Voice quality
you're sure to
hear about.

Ascom d63

Ascom d63. Quite possibly the world's hardest working handset.

Wideband audio—the Ascom d63 advantage

The Ascom d63 features 'wideband audio', extended bandwidth of 50Hz – 7,000Hz that delivers exceptional sound quality that goes beyond traditional telephony. And it's backward compatible, achieving outstanding sound quality even when communicating with conventional devices. The Ascom d63 — voice quality you're sure to hear about.

Easy integration for smarter messaging

The Ascom d63 is designed to integrate and work seamlessly with third-party systems*. This is made possible by Ascom's Unite middleware, which enables two-way texting and interactive messaging directly on the handset. Ascom Unite can also be configured to filter, sorts and prioritizes alerts — then ensures they are displayed on the Ascom d63's bright, easy-to-read color screen.

Personal alarms

The Ascom d63 is more than a telephony and messaging handset. It also features an alarm button that can be used/ configured to trigger duress calls. DECT location functionality means colleagues are notified of the handset's location — making the Ascom d63 particularly suitable for lone workers. Infra red location enables room level accuracy.

Ascom d63:

- Wideband audio
- Interactive messaging
- Prioritized and color-coded messages
- DECT Security (encryption)
- Centralized management
- Easy registration
- Shared phone
- Bluetooth
- Alarm button
- DECT location
- IR location



ascom

* Supported workflows, interfaces and message types are specified in and subject to limitations described in Unite product documentation. Not all configurations may be available in all countries where the d63 is sold.

ASCOM d63 FEATURES AT A GLANCE

<ul style="list-style-type: none"> • Wideband Audio • Centralized management • Easy registration • Interactive messaging • Priority handling of calls and messages • Shared phone 	<ul style="list-style-type: none"> • Push-to-talk (PTT) • Push-button alarm • Support for graphical messaging • 18 languages + 1 downloadable • User and system profiles • DECT and IR location 	<ul style="list-style-type: none"> • Bluetooth • Dynamic output power • Color-coded messaging • Display messages upside down • Pre-programmed messages • Up to 5 Emergency numbers
---	---	--

ASCOM d63 VARIANT FEATURE COMPARISON

	Ascom d63 Talker	Ascom d63 Messenger	Ascom d63 Protector
Centralized management	✓	✓	✓
Bluetooth	✓	✓	✓
Advanced messaging		✓	✓
DECT location		✓	✓
IR location			✓
Push-button alarm			✓

ASCOM d63 TECHNICAL SPECIFICATIONS


<p>Dimensions 137 x 52 x 21.5 mm. Weight (incl. battery & clip) 113g. Display 31 x 41 (2,0 inch).TFT. Color: BLACK: Talker, Messenger, Protector WHITE: Messenger only</p>	<p>Audio Ring signal: Adjustable in 8 steps. Earpiece: Adjustable in 8 steps of 3dB each. Max. sound ring signal level: 88 dBA @ 10 cm. Loudspeaker: DSP assisted duplex loudspeaker.</p>	<p>Phonebook Central phonebook: unlimited no. of entries. Company phonebook: 1000 entries. Local phonebook: 250 entries. Selectable ring tones per contact.</p>
<p>User interface High resolution, Color TFT display 262K individual colors. 240 x 320 pixel backlit LCD Indicator: Sound indicates incoming call/message. Vibration: Incoming call/message. Buttons & Keys: 3 soft keys, 5-way navigation key, off-hook key, on-hook and power on/off on the same key, numerical keys, sound off key, volume up/down, alarm/multifunction button, mute button.</p>	<p>Telephony Indication: 15 pre-set ring signals + 10 customizable, vibration. Answer call: Button press or auto answer. Call list storage capacity: 25 received, dialed and missed calls, with time stamp. Emergency numbers: Up to 5 configurable, no need to unlock keypad before dialing.</p>	<p>Security and encryption Full support of the DECT Security EN300 444 feature N35, as specified by the DECT forum.</p>
<p>Languages 18 languages: Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Norwegian, Polish, Portuguese (Brazilian), Russian, Slovakian, Spanish, Swedish and Turkish + 1 downloadable.</p>	<p>Messaging Storage capacity: Up to 20,000 characters, 30 received/sent messages. Messages from handset to handset 160 characters. Beep depending on urgency and customizable beeps. Pre-programmed messages (pre-set or personal).</p>	<p>Bluetooth Supports handsfree profiles. See data sheet for tested headsets.</p>
<p>Radio DECT protocol detection: Automatic detection and configuration for US DECT and EU DECT at initial registration. Frequency range: EU (1880-1900 MHz), US (1920-1930 MHz), LA (1910-1930 MHz), BR (1910-1920 MHz), Other (1900-1920 MHz). Modulation: GFSK. Channel spacing: 1.728 MHz. Antenna: Integral. Sensitivity: -93 dBm. Radiated power: EU 250 mW, US 100 mW.</p>	<p>Environmental Operating temperature: 0°C to +40°C. Storage temperature¹: -20°C to +60°C. Enclosure protection: IP44, IEC EN60529. Immunity to electromagnetic fields: 3V/m EN61000-4-3. Immunity to ESD: 4 kV contact discharge, 8 kV air discharge (EN61000-4-2). Free fall test, standard product: IEC 60068-2-32, procedure 1, dropped 12 times from 1 meter. Ascom approves 12 drops from 1.5 meters.</p>	<p>Battery Type: Li-polymer. Speech time: 20 hrs. Stand-by time: 240 hrs without activated screensaver. Charge time: < 4 hrs. Discharge/charge cycles: >=80% capacity left after 400 full charge/discharge cycles.</p>
<p>Connectors Multi-purpose connector for battery charging, software download and configuration. Standard 3.5 mm headset connector.</p>	<p>Compliance Compliance to EU, US, Canadian and Australian standards – please see the data sheet.</p>	<p>Location DECT location and Infra Red (IR) location.</p>
		<p>Accessories See Accessories sheet.</p>

¹Storing Li-polymer batteries at high temperatures can rapidly and permanently reduce capacity.

Ascom Wireless Solutions

Grimbodalen 2
402 76 Gothenburg
Sweden
Phone: +46 31 55 93 00
www.ascom.com/ws

ascom

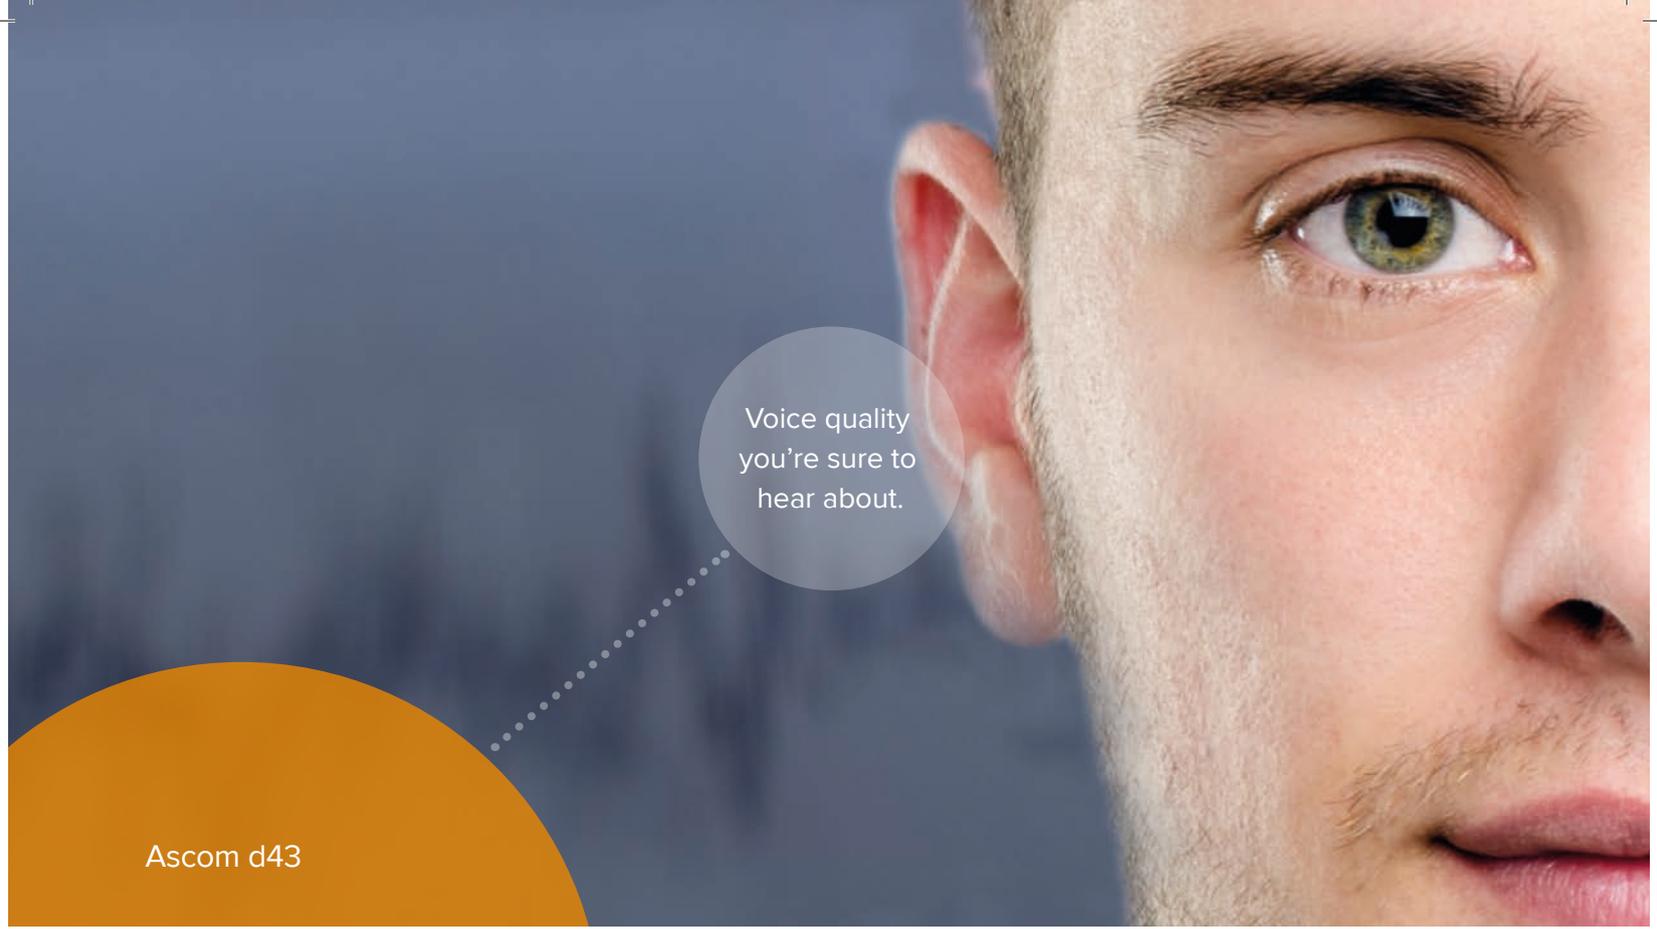

Voice quality
you're sure to
hear about.

Ascom d43

Ascom d43. Impressively advanced on the inside. Incredibly easy to use on the outside.

Wideband audio—the Ascom d43 advantage

The Ascom d43 features 'wideband audio', extended bandwidth of 50Hz – 7,000Hz that delivers exceptional sound quality that goes beyond traditional telephony. And it's backward compatible, achieving outstanding sound quality even when communicating with conventional devices. The Ascom d43 — voice quality you're sure to hear about.

Easy to use, just as easy to manage

The Ascom d43 supports centralized management. Thanks to Ascom Unite device manager, software updates and parameter synchronizations are easily administered over the air. Settings for each handset are stored and administered centrally.

Contacts, contacts, contacts

The Ascom d43 has an internal phonebook with a storage capacity of 250 contacts. An additional 1,000 entries can be downloaded from a local company phonebook. Users can also access a centralized phonebook in order to search for other contacts on demand.

Ascom d43:

- Wideband audio
- High voice quality
- Centralized management
- Company, central phonebook
- Up to 5 emergency numbers
- Easy registration



ascom

ASCOM d43 FEATURES AT A GLANCE

<ul style="list-style-type: none"> • Wideband Audio • Backlit color TFT screen • Easy registration • Centralized Management • Call list displaying the last 25 calls • Central phonebook 	<ul style="list-style-type: none"> • Local phonebook with 250 entries • Company phonebook with 1000 entries • Dynamic output power • Handsfree operation • Vibrator • Large illuminated display 	<ul style="list-style-type: none"> • 18 languages + 1 downloadable • Headset with standard connector • Manual and automatic keypad lock • Up to 5 emergency numbers
--	---	---

ASCOM d43 TECHNICAL SPECIFICATIONS

<p>Dimensions 137 x 52 x 21.5 mm. Weight (incl. battery & clip) 114g. Display 1,8". 28x35mm.</p>	<p>Audio Ring signal: Adjustable in 8 steps. Earpiece: Adjustable in 8 steps of 3dB each. Max. sound ring signal level: 88 dBA @ 10 cm. Loudspeaker: Duplex loud speaking function.</p>	<p>Phonebook Central phonebook: Unlimited no. of entries. Company phonebook: 1000 entries. Local phonebook: 250 entries. Selectable ring tones per contact.</p>
<p>User interface High resolution Color LCD display with white LED backlighting. 262K individual colors. Indicator: Sound indicates incoming call, and charging. Vibration: Incoming call. Buttons & Keys: 3 soft keys, 4-way navigation key, off-hook key, on-hook and power on/off on the same key, numerical keys and volume up/down.</p>	<p>Telephony Indication: 14 ring signals, vibration. Answer call: Button press or auto answer. Call list storage capacity: 25 received, dialed and missed calls, with time stamp. Up to 5 emergency numbers: dial immediately without unlocking the keypad.</p>	<p>Security and encryption Full support of the DECT Security EN300 444 feature N35, as specified by the DECT forum.</p>
<p>Languages 18 languages: Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Norwegian, Polish, Portuguese (Brazilian), Russian, Slovakian, Spanish, Swedish and Turkish + 1 downloadable.</p>	<p>Messaging Max length: 12 characters to handset. Storage: 0 messages.</p>	<p>Battery Type: Li-Ion. Speech time: 16 hrs under optimal conditions. Stand-by time: 180 hrs under optimal conditions. Charge time: < 4 hrs. Discharge/charge cycles: cycles: >=65% capacity left after 500 full charge/discharge cycles.</p>
<p>Radio DECT protocol detection: Automatic detection and configuration for US DECT and EU DECT at initial registration. Frequency range: EU (1880-1900 MHz), US (1920-1930 MHz), L A (1910-1930 MHz), BR (1910-1920 MHz), Other (1900-1920 MHz). Modulation: GFSK. Channel spacing: 1.728 MHz. Antenna: Integral. Sensitivity: -93 dBm. Radiated power: EU 250 mW, US 100 mW.</p>	<p>Environmental Operating temperature: 0°C to +40°C. Storage temperature¹: -20°C to +60°C. Enclosure protection: IP40, IEC EN60529. Immunity to electromagnetic fields: 3V/m EN61000-4-3. Immunity to ESD: 4 kV contact discharge, 8 kV air discharge (EN61000-4-2). Free fall test, standard product: IEC 60068-2-32, procedure 1, dropped 12 times from 1 meter.</p>	<p>Connectors Multi-purpose connector for battery charging, software download and configuration. Standard 3.5 mm headset connector.</p> <p>Compliance Compliance to EU, US, Canadian and Australian standards – please see the data sheet.</p> <p>Accessories See Accessories sheet.</p>

¹ Storing Li-Ion batteries at high temperatures can rapidly and permanently reduce capacity.

Ascom Wireless Solutions

Grimbodalen 2
402 76 Gothenburg
Sweden
Phone: +46 31 55 93 00
www.ascom.com/ws